























	L/R	; 3D ;	
		3D;	: 2D; ;


12 DC		728 DC	
0.712 DC	IDDQ	0.5 mA	
≥100MΩ		-20℃~+70℃	
-40°C~+85°C		CVBS/AHD	
CVBS/VGA/AHD	1 3		
VGA: 1280*720 30fps/25)		
AHD: 1280*720 30fps/25fps CVBS: NTSC/PAL			
UART, CAN			
	I		
-30°C~+100°C	CMOS	Sony 225	
А	ISP-	NVP2431	
99.8%		210°	
PVC		140°	
+		6G+1R	
		1280H * 720V	
		-40~85°C	

-2-

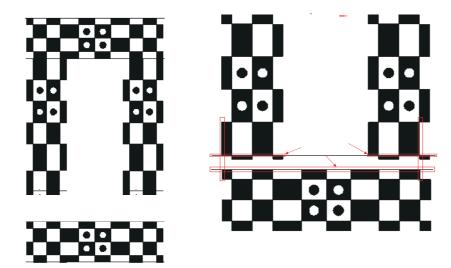






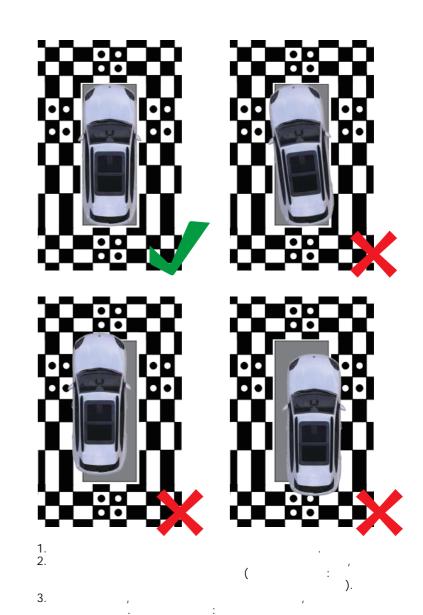


-4-

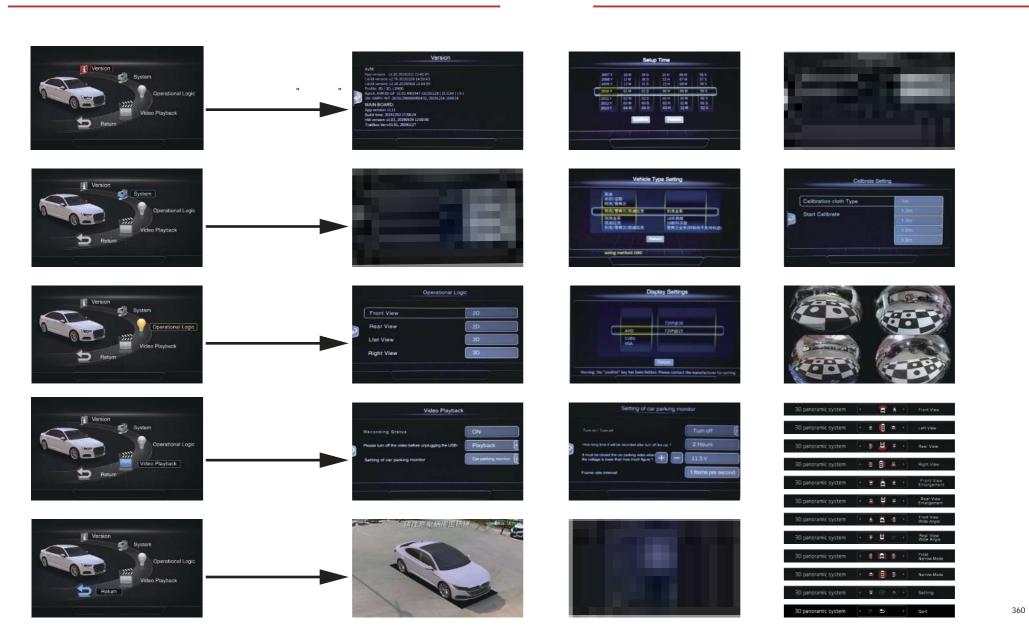


-6-



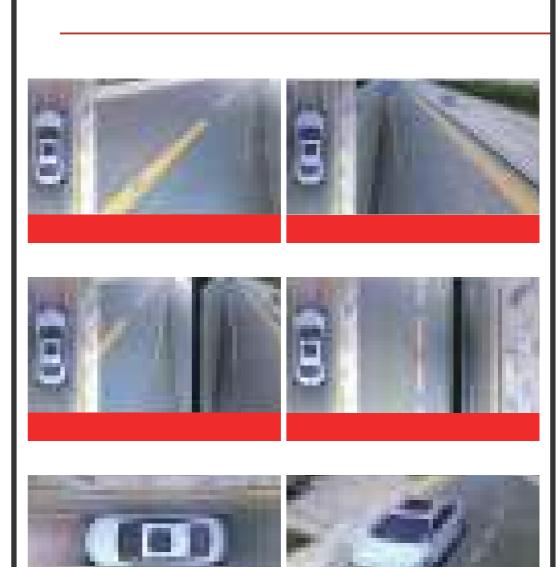



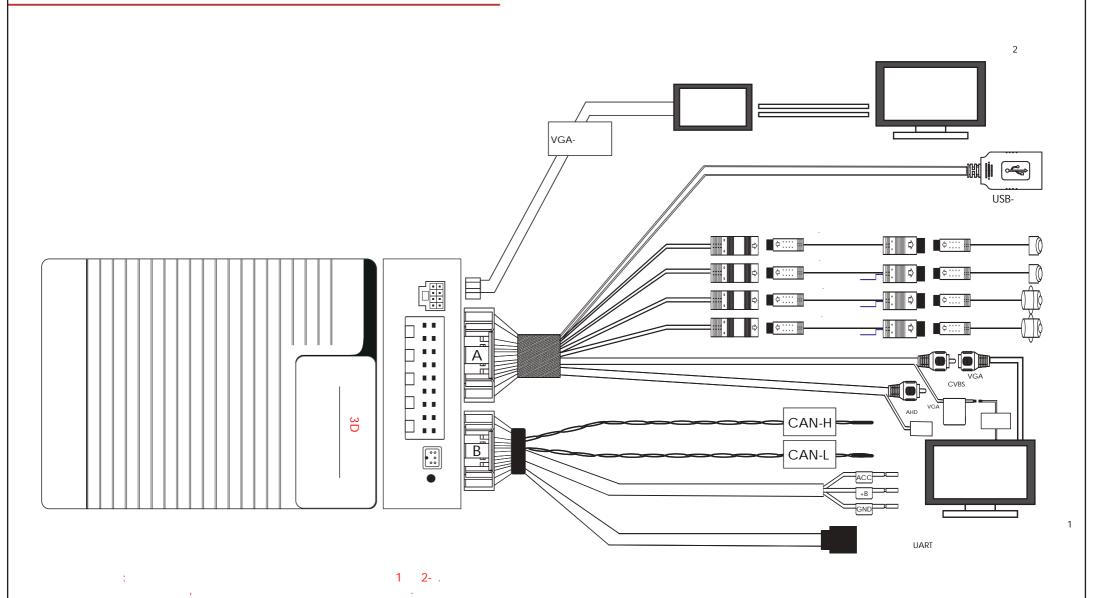

-10-

-11-

- !
- ·
- .

- ()
 ' .

-12-